




Apple® II Super Serial Card User's Manual

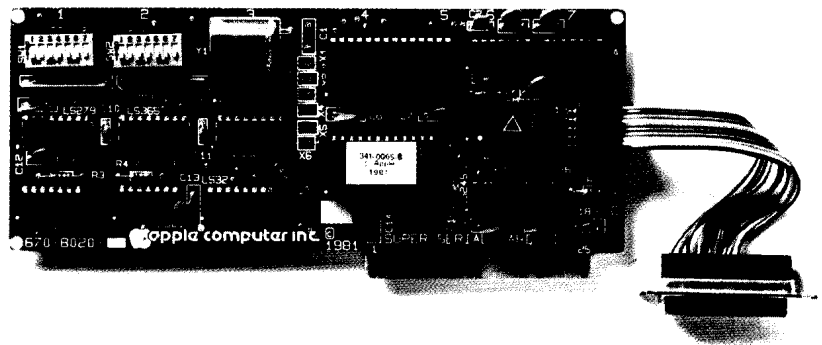

*Compatible with Apple II,
II Plus, and IIe.*

Copyright

©Copyright 1985, Apple Computer, Inc. for all nontextual material, graphics, figures, photographs, and all computer program listings or code in any form, including object and source code. All rights reserved.

For some products, a multi-use license may be purchased to allow the software to be used on more than one computer owned by the purchaser, including a shared-disk system. (Contact your authorized Apple dealer for information on multi-use licenses.)

Apple, the Apple logo, ImageWriter, and Super Serial Card are trademarks of Apple Computer, Inc.

Scribe is a registered trademark licensed to Apple Computer, Inc. by Unilogic, Ltd.

Printed in Singapore.

Limited Warranty on Media and Replacement

If you discover physical defects in the manuals distributed with an Apple product or in the media on which a software product is distributed, Apple will replace the media or manuals at no charge to you, provided you return the item to be replaced with proof of purchase to Apple or an authorized Apple dealer during the 90-day period after you purchased the software. In addition, Apple will replace damaged software media and manuals for as long as the software product is included in Apple's Media Exchange Program. While not an upgrade or update method, this program offers additional protection for up to two years or more from the date of your original purchase. See your authorized Apple dealer for program coverage and details. In some countries the replacement period may be different; check with your authorized Apple dealer.

ALL IMPLIED WARRANTIES ON THE MEDIA AND MANUALS, INCLUDING IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED IN DURATION TO NINETY (90) DAYS FROM THE DATE OF THE ORIGINAL RETAIL PURCHASE OF THIS PRODUCT.

Even though Apple has tested the software and reviewed the documentation, **APPLE MAKES NO WARRANTY OR REPRESENTATION, EITHER EXPRESS OR IMPLIED, WITH RESPECT TO SOFTWARE, ITS QUALITY, PERFORMANCE, MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE. AS A RESULT, THIS SOFTWARE IS SOLD "AS IS," AND YOU THE PURCHASER ARE ASSUMING THE ENTIRE RISK AS TO ITS QUALITY AND PERFORMANCE.**

IN NO EVENT WILL APPLE BE LIABLE FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY DEFECT IN THE SOFTWARE OR ITS DOCUMENTATION, even if advised of the possibility of such damages. In particular, Apple shall have no liability for any programs or data stored in or used with Apple products, including the costs of recovering such programs or data.

THE WARRANTY AND REMEDIES SET FORTH ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHERS, ORAL OR WRITTEN, EXPRESS OR IMPLIED. No Apple dealer, agent, or employee is authorized to make any modification, extension, or addition to this warranty.

Some states do not allow the exclusion or limitation of implied warranties or liability for incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.


Warning

This equipment has been certified to comply with the limits for a Class B computing device pursuant to Subpart J of Part 15 of FCC rules. Only peripherals (computer input/output devices, terminals, printers, etc.) certified to comply with Class B limits may be attached to this computer. Operation with noncertified peripherals is likely to result in interference to radio and television reception.



Apple® II Super Serial Card™

User's Manual

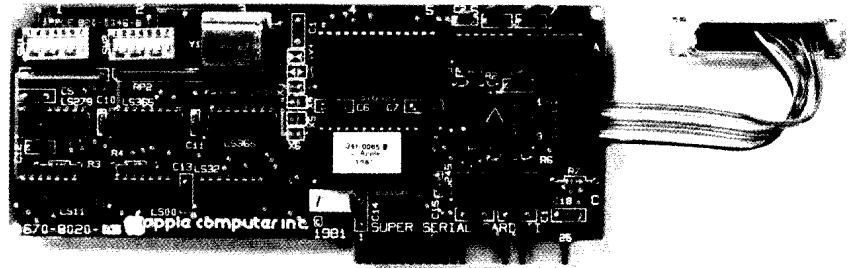

Contents

	Figures and Tables	vi
	Radio and Television Interference	viii
<hr/>		
CHAPTER 1	Installing Your Super Serial Card	1
	About Your Super Serial Card	2
	Setting the Jumper Block	3
	Setting the Switches	3
	Installing the Super Serial Card	4
<hr/>		
CHAPTER 2	What the Switches Do	9
	Figuring Out How to Set the Switches	10
	Setting the Switches for a Printer	11
	Baud Rate	12
	An Example	12
	Mode	13
	Stop Bits	13
	Delay After Carriage Returns	14
	Line Width	14
	An Example	15
	Generate Line Feeds	15
	Interrupts	16
	RS232C Signals	16

Setting the Switches for a Modem 17

Baud Rate 18

An Example 19

Mode 19

Stop Bits 19

Data Bits 20

Parity 21

An Example 21

Generate Line Feeds 21

Interrupts 22

RS232C Signals 23

APPENDIX A

Troubleshooting 25

APPENDIX B

Super Serial Card Commands 27

Overriding Commands From a Program 28

Overriding Commands From the Keyboard 28

Printer Commands 29

Baud Rate 29

Data Format 29

Parity 29

Set Time Delays 30

Generate Carriage Return On Column Overflow 30

Generate Line Feed 31

Mask Line Feed 31

Reset the Super Serial Card 31

Translate Lowercase Characters (Apple II and II Plus)	31
Zap (Suppress) Control Characters	32
Find Keyboard	33
XOFF Recognition	33
Tab in BASIC	33
Modem (Communications) Commands	33
Baud Rate	34
Data Format	34
Parity	34
Generate Line Feed	34
Mask Line Feed	35
Reset the Super Serial Card	35
Set Time Delays	35
Translate Lowercase Characters (Apple II and II Plus)	36
Zap (Suppress) Control Characters	36
Find Keyboard	37
XOFF Recognition	37
Specify Screen Slot (Apple II and II Plus)	37
Echo Characters on the Screen	38
Terminal Mode	38
Typing Lowercase Characters (Apple II and II Plus)	38
Enter Terminal Mode	39
Transmit a Break Signal	39
Special Characters	39
Quit Terminal Mode	39
A Terminal Mode Example	39

APPENDIX C

Firmware	41
Pascal 1.1 Firmware Protocol	42
Entry Points	43
Device Identification	44
Super Serial Card Entry Points	46
BASIC Entry Points	46
Pascal 1.0 Entry Points	47
Pascal 1.1 Entry Points	47

Glossary	49
Index	51
Quick Reference Card	

Figures and Tables

CHAPTER 1

	Installing Your Super Serial Card	1
Figure 1-1	Switches and Jumper Block	2
Table 1-1	Switch Settings for Apple Devices	3
Figure 1-2	Switches Set to ON and OFF	4
Figure 1-3	Slide Nut Plate Onto Ribbon Cable	5
Figure 1-4	Hold Connector and Nut Plate up to Back Panel	5
Figure 1-5	Attach Connector to Back Panel	5
Figure 1-6	Connect Ribbon Cable to Card	6
Figure 1-7	Install Card in Slot 1 or 2	6

CHAPTER 2

	What the Switches Do	9
Figure 2-1	What the Switches Do	10
Table 2-1	Baud Rate Switch Settings	12
Figure 2-2	Switches Set for a 9600 Baud Device	12
Figure 2-3	Printer Mode Setting	13
Figure 2-4	Stop Bit Settings	13
Figure 2-5	Carriage Return Settings	14
Table 2-2	Line Width Switch Settings	15
Figure 2-6	80-Character-Per-Line Switch Setting	15
Figure 2-7	Line Feed Settings	16
Figure 2-8	Interrupt Switch Setting	16
Figure 2-9	RS232C Switch Setting	17
Table 2-3	Baud Rate Switch Settings	18
Figure 2-10	Switches Set for a 300 Baud Modem	19
Figure 2-11	Switches Set for Modem Mode	19
Figure 2-12	Stop Bit Switch Settings	20
Figure 2-13	Data Bit Switch Settings	20

Table 2-4	Parity Switch Settings	21
Figure 2-14	No Parity Setting	21
Figure 2-15	Line Feed Settings	22
Figure 2-16	Interrupt Settings	22
Figure 2-17	RS232C Switch Settings	23

APPENDIX B

Super Serial Commands		27
Table B-1	Lowercase Character Displays	32
Table B-2	Lowercase Character Displays	36

APPENDIX C

Firmware		41
Table C-1	I/O Routine Offsets and Registers Under Pascal 1.1	44
Table C-2	Bytes Used For Device Identification	45
Table C-3	Device Class Digit	45
Table C-4	BASIC Entry Points Used by the Super Serial Card	46
Table C-5	Pascal 1.0 Entry Points Used by the Super Serial Card	47
Table C-6	Pascal 1.1 Offsets Used by the Super Serial Card	48

Radio and Television Interference

The equipment described in this manual generates and uses radio-frequency energy. If it is not installed and used properly—that is, in strict accordance with our instructions—it may cause interference with radio and television reception.

This equipment has been tested and complies with the limits for a Class B computing device in accordance with the specifications in Subpart J, Part 15, of FCC rules. These rules are designed to provide reasonable protection against such interference in a residential installation. However, there is no guarantee that the interference will not occur in a particular installation, especially if a "rabbit ear" television antenna is used. (A "rabbit ear" antenna is the telescoping-rod type usually contained on television receivers.)

You can determine whether your computer is causing interference by turning it off. If the interference stops, it was probably caused by the computer or its peripherals. To further isolate the problem, disconnect the peripheral devices and their input/output cables one at a time. If the interference stops, it was caused by either the peripheral device or the I/O cable. These devices usually require shielded I/O cables. For Apple peripherals, you can obtain the proper **shielded cable** from your dealer. For non-Apple peripheral devices, contact the manufacturer or dealer for assistance.

If your computer does cause interference to television or radio reception, you can try to correct the interference by using one or more of the following measures:

- Turn the television or radio antenna until the interference stops.
- Move the computer to one side or the other of the television or radio.

A **shielded cable** is a cable that uses a metallic wrap around the wires to reduce the potential effects of radio frequency interference.


Reducing Your Super Serial Card

- Move the computer farther away from the television or radio.
- Plug the computer into an outlet that is on a different circuit than the television or radio. (That is, make certain the computer and the radio or television set are on circuits controlled by different circuit breakers or fuses.)
- Consider installing a rooftop television antenna with coaxial cable lead-in between the antenna and television.

If necessary, you should consult your authorized Apple dealer or an experienced radio/television technician for additional suggestions.

Chapter 1

Installing Your Super Serial Card

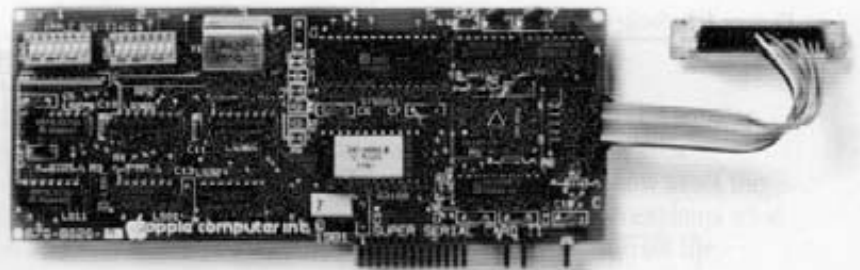


About Your Super Serial Card

Serial interface means that the peripheral device receives information from the computer one bit at a time, as opposed to parallel interface, which means that the device receives information eight bits at a time. (It takes eight bits to represent each character on the keyboard. Read the *Apple IIe Owner's Manual* for more about bits and other computer basics.)

The Apple® II Super Serial Card™ is an interface card that makes it possible for your Apple II, Apple II Plus, or Apple IIe to communicate with serial devices—that is, printers, modems, plotters, graphics tablets, and other devices that use a **serial interface**.

Because the Super Serial Card works with a wide variety of peripheral devices, you need to customize the card to work with a particular device. You customize the card by setting the switches in the upper-left corner of the card and by pointing the triangle on the jumper block either toward the word *MODEM* or *TERMINAL*. (See Figure 1-1.)

Figure 1-1. Switches and Jumper Block

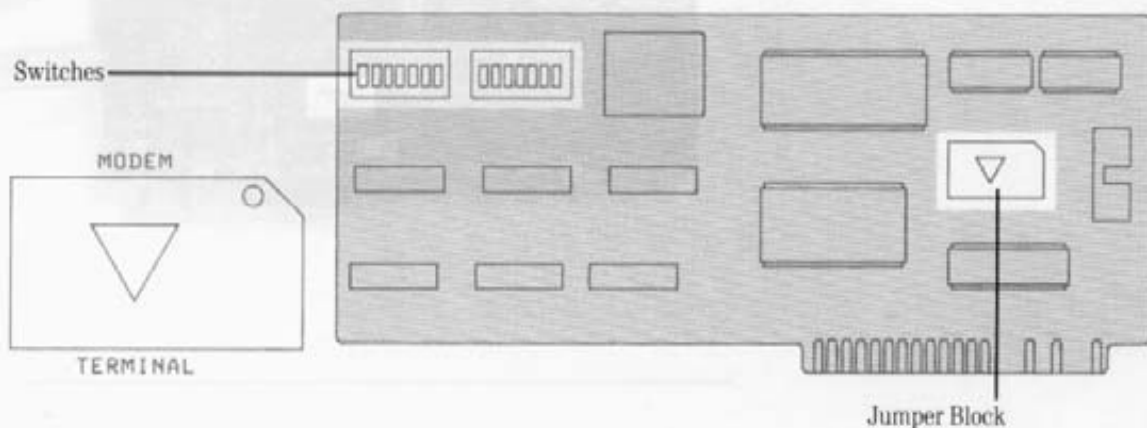

For Future Reference: In this manual, references to the set of switches on the left are prefaced with a 1. (For example, 1-3 is switch 3 in the left set of switches.) Switches on the right are prefaced with a 2. (For example, 2-5 is switch 5 in the right set of switches.)

Setting the Jumper Block

The triangle on the jumper block should be pointing to the word *MODEM* if you're attaching a modem to your Super Serial Card. It should be pointing toward the word *TERMINAL* if you're attaching a printer or plotter.

By the Way: If you alternate between using your Super Serial Card with a printer and a modem, don't forget to change the jumper block and the switch settings.

If the jumper block is pointing the wrong way, pull it off and put it back so that it's pointing in the right direction. Use a screw driver and gently pry it loose. When you reinstall the jumper block, be sure the pins are lined up exactly with the sockets on the card before you press it down into place.

Setting the Switches

The following chart shows the correct switch settings for several popular peripheral devices. If you have some other kind of device, ask your authorized Apple dealer or the manufacturer of the product how to set the switches on your Super Serial Card, or read Chapter 2, which explains what each switch controls, so you can figure out for yourself how to set the switches.

By the Way: If you have trouble changing the switch settings with your fingers, use a pointed object like the tip of a pen.


Table 1-1. Switch Settings for Apple Devices

Apple Device	1-1	1-2	1-3	1-4	1-5	1-6	1-7	2-1	2-2	2-3	2-4	2-5	2-6	2-7
ImageWriter™	OFF	OFF	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF	OFF
ImageWriter™ II	OFF	OFF	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF	OFF
Scribe®	OFF	OFF	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF	OFF
Daisy Wheel	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF	OFF
Plotter	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF	OFF
Modem 300	ON	OFF	OFF	ON	ON	ON	ON	ON	OFF	ON	ON	OFF	ON	OFF
Modem 1200	OFF	ON	ON	ON	ON	ON	ON	ON	OFF	ON	ON	OFF	ON	OFF
Personal Modem	OFF	ON	ON	ON	ON	ON	ON	ON	OFF	ON	ON	OFF	ON	OFF

Some Super Serial Card switches are labeled *OPEN* and *CLOSED* instead of *OFF* and *ON*. *OPEN* is equivalent to *OFF*. *CLOSED* is equivalent to *ON*.

Figure 1-2 shows you how a switch looks when it's in the ON position and how it looks when it's in the OFF position. (The switches on your card might look slightly different, but they work the same way.)

Figure 1-2. Switches Set to ON and OFF

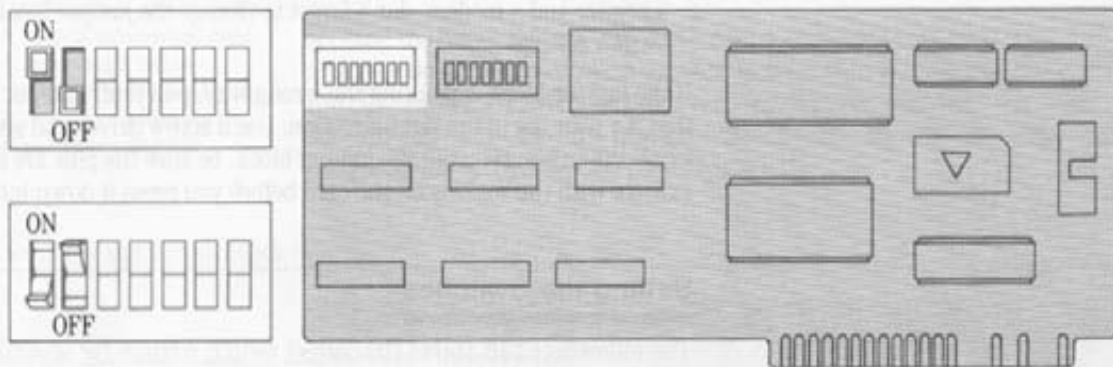


Overriding the Switch Settings: It is possible to override most of the switch settings on the card by imbedding commands within BASIC or Pascal programs or by typing commands at the keyboard. This is not something the average user of application programs would need or want to do, but it's useful for programmers. Refer to the reference card at the back of this manual for a list of commands and read Appendix B, "Super Serial Card Commands."

Installing the Super Serial Card

Once you've set the switches and got the jumper block pointing the right way for your peripheral device, follow these instructions to install the card:

1. Turn off the Apple II power switch, remove the cover of your Apple II, and touch the power supply case to discharge any static electricity that might be present on your clothes or body.
2. Slide the nut plate onto the ribbon cable as shown in Figure 1-3. Make sure the nuts on the nut plate face away from the 25-pin connector.

Figure 1-3. Slide Nut Plate Onto Ribbon Cable

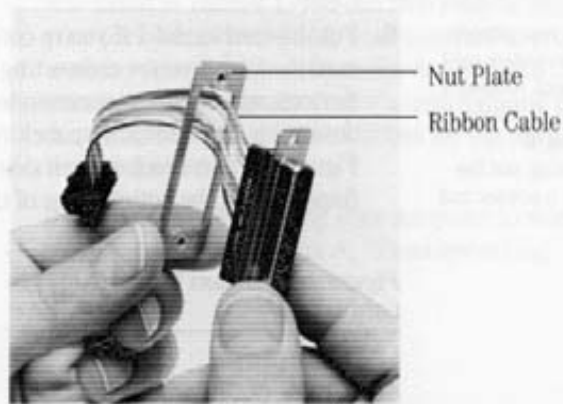

3. Hold the connector and nut plate up to the inside of one of the large openings in the back panel as shown in Figure 1-4. (It doesn't matter which back panel opening you use, but choose one of the openings near slot 1.)
4. Attach the 25-pin connector to the back panel by using the screws and wrench that came with the Super Serial Card. See Figure 1-5. (Don't overtighten the screws or you could bend the connector.)

Figure 1-4. Hold Connector and Nut Plate up to Back Panel


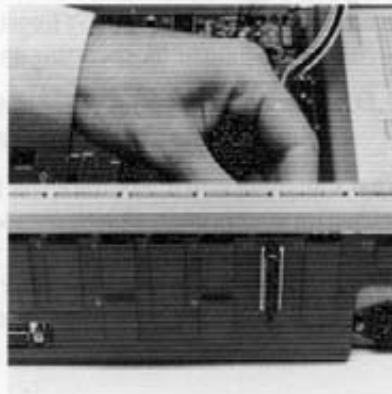


Figure 1-5. Attach Connector to Back Panel

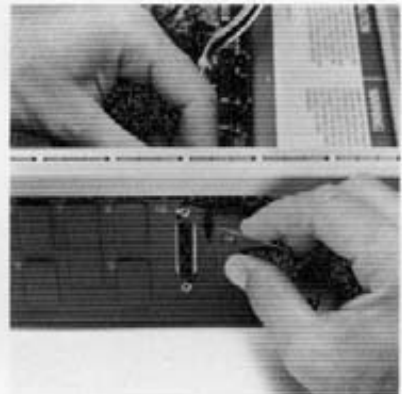

Apple II, II Plus

If you are connecting your Super Serial Card to an Apple II or an Apple II Plus, you'll need a special clamp to attach the cable to the back panel. Ask your dealer for service parts 805-0084 and 805-0085.

Pascal programs require that your printer card be in slot 1 and that your modem card be in slot 2. For BASIC programs, it doesn't matter what slot the card is in. If you don't want to worry about what kind of application program you're using, put the Super Serial Card in slot 1 for a printer and slot 2 for a modem.

5. Connect the ribbon cable to the Super Serial Card as shown in Figure 1-6.
6. Put the card in slot 1 if you're connecting the card to a printer. Put the card in slot 2 if you're connecting the card to a modem. (For other devices, use the slot recommended in the manual that came with the device.) Install the card by rocking it from back to front as shown in Figure 1-7. Don't rock it from side to side, and don't touch the gold fingers along the bottom edge of the card.

Figure 1-6. Connect Ribbon Cable to Card

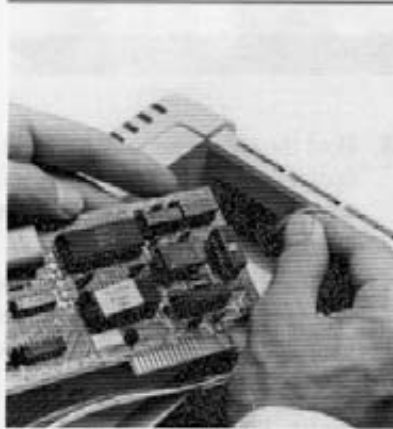


Figure 1-7. Install Card in Slot 1 or 2



By the Way: If you alternate between using your Super Serial Card with a printer and a modem, don't forget to change the card's slot when you change the jumper block setting and the switch settings.


7. Connect the cable from your printer or modem to the connector attached to the back panel of your computer.

That's all there is to it. Put the cover back on your computer and finish setting up your printer, plotter, or modem according to the instructions that came with it. Keep in mind that your printer or modem may also have switches that need to be set correctly before your computer and peripheral device can speak the same language at the same speed.

You Can Stop Reading Right Now: If your printer, plotter, or modem was listed in Table 1-1, you can stop reading right now and start using your peripheral device with your application programs. The next chapter explains what each switch on the Super Serial Card controls. It's interesting stuff to know, but it's only required reading for users who don't know how to set the switches for the device they're connecting to their computer.

Important!

If you have trouble getting your computer to work with your printer or modem, consult Appendix A, "Troubleshooting," for help.

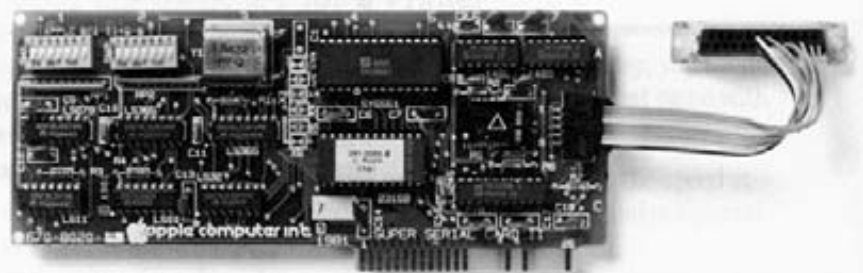


Figuring Out How to Set the Switches

If your printer, plotter, modem or other serial device isn't listed in Table 1-1, you need to figure out for yourself how to set the switches on the Super Serial Card. In order to do this, you need to know what the various switches control, and you need to know certain characteristics about your device—like how fast it wants to receive data from the computer, in what form it wants to receive data, and whether the card or device will handle things like carriage returns and line feeds. All of this information should be listed in the manual that came with your peripheral device or in the manual that was provided by the information service you will be accessing with your modem. If it's not, ask your authorized Apple dealer or the manufacturer of the device for assistance.

Figure 2-1 gives you an overview of what the various switches on the Super Serial Card control. Notice that the switches control different things depending on whether you are using your card with a printer/plotter or with a modem (The upper set of switches in Figure 2-1 is set for an Apple ImageWriter II. The lower set of switches is set for the Apple Personal Modem.)

Figure 2-1. What the Switches Do

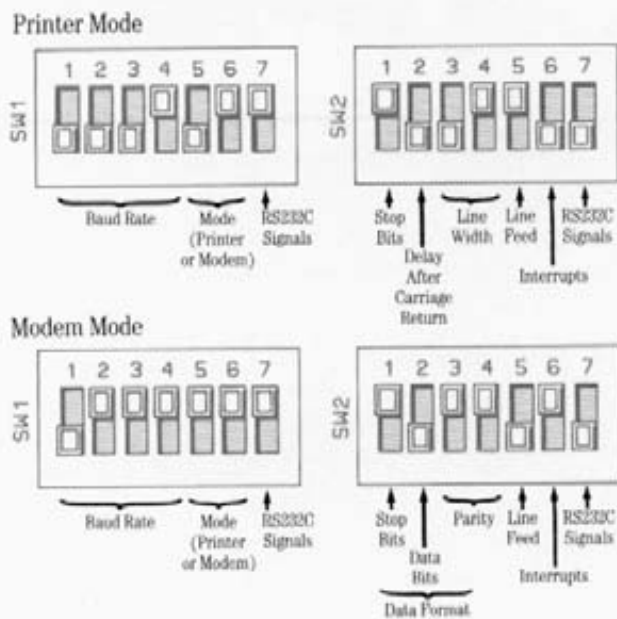

By the Way: Some application programs let you select from a menu the printer or modem you want to use. In cases like these, the program overrides the switch settings on the card, so it doesn't matter how they're set. If you'd just as soon avoid setting the switches on your Super Serial Card, try using the application with your device. If it works, you don't need to set the switches. If it doesn't, you do.

Important!

Read the following section if you are connecting a printer or plotter to your Super Serial Card. Read the section called "Setting the Switches for a Modem" if you're connecting a modem.

Setting the Switches for a Printer

From now on, general references to *printers* and *printer mode* also apply to plotters.

Before you can set the Super Serial Card switches for a printer, you need to know a few things about your printer. Consult the manual that came with your printer to find out the answers to these questions:

- **What is the baud rate for your printer?** Baud rate is the speed at which information is exchanged between the computer and peripheral devices. The most common baud rate for printers is 9600.
- **How many stop bits does your printer expect?** The computer sends information to the printer in binary form —0's and 1's (called **bits**). It takes a string of seven or eight bits (called **data bits**) to form each of the characters on the keyboard. Stop bits are special bits that signal the end of each character. Most printers expect one stop bit; a few types of slower printers require two.
- **Does your printer need a delay after each carriage return?** Slower printers need time for the print head to reposition itself at the beginning of the next line. Most printers don't.
- **What is the maximum number of characters your printer can fit on each line?** Most printers can fit 80 characters on a line.
- **Does your printer automatically generate a line feed after each carriage return?** (That is, does the print head automatically advance to the beginning of the next line, or, left to its own devices, would it keep printing on the same line over and over again?) Some printers expect the computer to generate line feeds; others take it upon themselves.

Once you have the answers to these five questions, you should have no trouble setting the switches for your device.

Baud Rate

Switches 1-1 through 1-4 determine the baud rate. Table 2-1 shows you how to set the switches for various baud rates:


Table 2-1. Baud Rate Switch Settings

Baud	1-1	1-2	1-3	1-4
50	ON	ON	ON	OFF
75	ON	ON	OFF	ON
110	ON	ON	OFF	OFF
135	ON	OFF	ON	ON
150	ON	OFF	ON	OFF
300	ON	OFF	OFF	ON
600	ON	OFF	OFF	OFF
1200	OFF	ON	ON	ON
1800	OFF	ON	ON	OFF
2400	OFF	ON	OFF	ON
3600	OFF	ON	OFF	OFF
4800	OFF	OFF	ON	ON
7200	OFF	OFF	ON	OFF
9600	OFF	OFF	OFF	ON
19200	OFF	OFF	OFF	OFF

An Example

Figure 2-2 shows you how to set switches 1-1 through 1-4 for a 9600 baud device.


Figure 2-2. Switches Set for a 9600 Baud Device

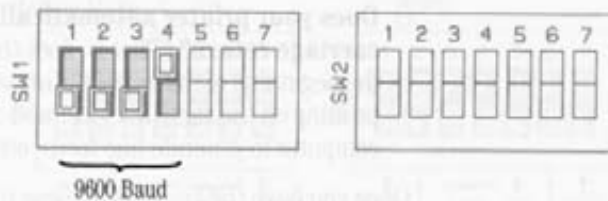

Mode

Switches 1-5 and 1-6 determine whether your card is in printer mode or modem mode. For printer mode, switch 1-5 should be set to OFF, and switch 1-6 should be set to ON. See Figure 2-3.

Figure 2-3. Printer Mode Setting

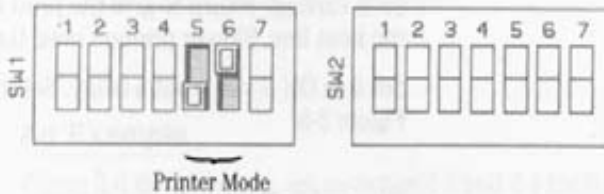


By the Way: Don't worry about switch 1-7 for now. It will be discussed in the section "RS232C Signals."

Stop Bits

Switch 2-1 determines whether the computer will send one or two stop bits after each string of data bits. Set it to ON if you want one stop bit. Set it to OFF if you want two stop bits. See Figure 2-4.

Figure 2-4. Stop Bit Settings

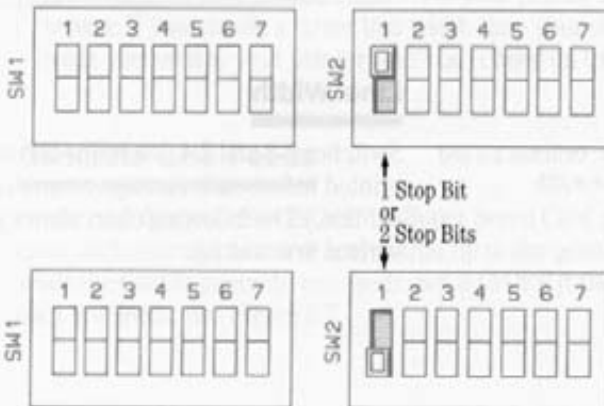


Slower printers need two stop bits; **most printers need only one**. (If you set the baud rate to 50, 75, or 110, set switch 2-1 to OFF, otherwise set it to ON.)

Delay After Carriage Returns

Switch 2-2 determines whether the computer will pause for $\frac{1}{4}$ second after each carriage return to give the print head time to get back to the start of the next line. Slower printers need the delay; **most printers don't**.

Set it to ON if you want a delay. Set it to OFF if you don't want a delay. See Figure 2-5.

Figure 2-5. Carriage Return Settings

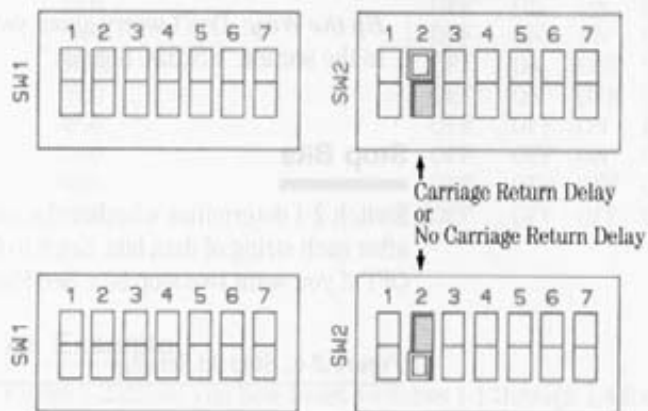

Line Width

In communications mode, switches 2-3 and 2-4 control parity, not line width.

Switches 2-3 and 2-4 determine the number of characters that will be printed before each carriage return. (Most printers can handle 80 characters per line.) The following chart shows you how to set the switches for the various line widths:

Table 2-2. Line Width Switch Settings


Characters Per Line	Switch 2-3	Switch 2-4
40	ON	ON
72	ON	OFF
80	OFF	ON
132	OFF	OFF

Setting the Switches for a Printer

An Example

Figure 2-6 shows how to set switches 2-3 and 2-4 for 80 characters per line.

Figure 2-6. 80-Character-Per-Line Switch Setting

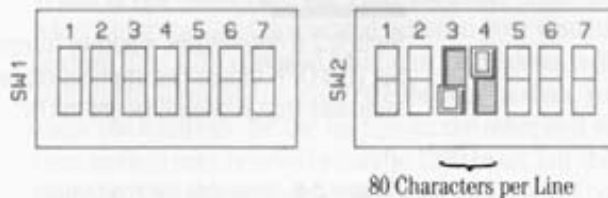


What You See on Your Screen: When the line width is set to 40 characters (or up to 80 characters if you have an 80-column card installed), the information you send to your printer will be echoed on your screen. If you choose a larger line width than your display can handle, what you send to your printer won't be echoed on the screen.

Generate Line Feeds

Switch 2-5 determines whether the Super Serial Card generates a line feed after each carriage return or leaves that up to the printer. Set it to ON if you want the card to generate line feeds. Set it to OFF if the printer generates its own line feeds. See Figure 2-7.


Figure 2-7. Line Feed Settings

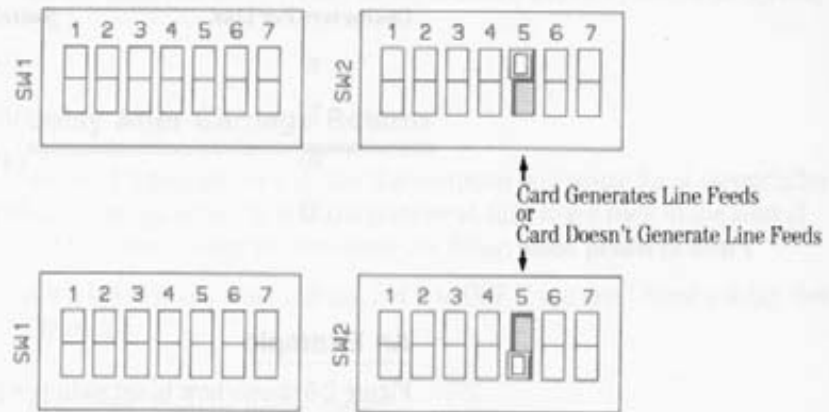

Interrupts

Switch 2-6 determines whether interrupts will be forwarded to the Apple II. Set it to OFF unless the application program documentation specifically indicates that it should be set to ON.


Figure 2-8. Interrupt Switch Setting

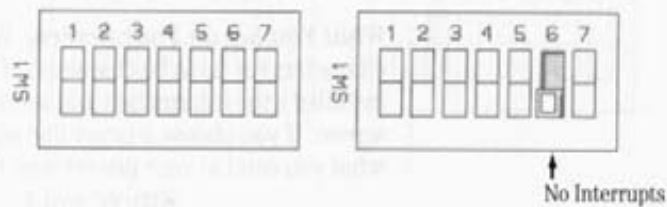

RS232C Signals

Switches 1-7 and 2-7 determine whether data will be exchanged in accordance with the RS232C standard (the norm for serial data) or according to some other protocol. Set 1-7 to ON and 2-7 to OFF unless the documentation tells you to set the switches some other way. See Figure 2-9.

Figure 2.9. RS232C Switch Setting

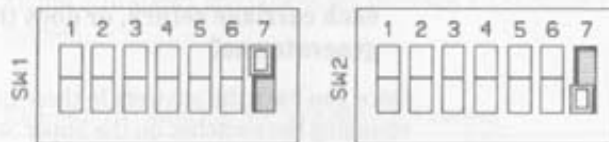

Setting the Switches for a Modem

Before you can set the Super Serial Card switches for a modem, you need to know a few things about your modem and the information service or other computer you'll be accessing with your modem. Consult the manual that came with your modem and the manual that was furnished by the information service to find out the answers to these questions:

- **What is the baud rate for your modem?** Baud rate is the speed at which information is exchanged between your computer and peripheral devices. The most common baud rate for modems is 300 or 1200. In addition to knowing the baud rate for your modem, you also need to know the baud rate for the modem on the other end of the phone line. Your modem may be able to handle 1200 baud, but the other modem might only be able to handle 300. The baud rates of both modems must be the same or you won't be able to exchange data.
- **How many data bits is the information service (or other computer) set up to send and receive?** The computer sends information through the modem in binary form —0's and 1's (called **bits**). It takes a string of seven or eight of these data bits to represent each character.
- **How many stop bits will be used to show where one character (string of data bits) ends and the next character begins?** The options are one stop bit or two.
- **What kind of parity (if any) will be used for error checking?** The information service (or other computer) you're dealing with can send a **parity bit** as a way of checking to see if information was transmitted accurately. The options are no parity, odd parity, or even parity. With odd parity, the sending device adds a bit to the end of each string of data bits to make the total number of 1 bits an odd number. With even parity, the sending device adds a bit to the end of each string of data bits to make the total number of 1 bits an even number. After transmission, the program adds up the total number of bits sent and compares the sum with the sum of those received.

- **Does the device on the other end of the phone line (a far-away printer, for example) automatically generate a line feed after each carriage return, or does the Super Serial Card need to generate one?**

Once you have the answers to these questions, you're ready to start changing the switches on the Super Serial Card.

Baud Rate

Switches 1-1 through 1-4 determine the baud rate. Table 2-3 shows you how to set the switches for various baud rates:


Table 2-3. Baud Rate Switch Settings

Baud	1-1	1-2	1-3	1-4
50	ON	ON	ON	OFF
75	ON	ON	OFF	ON
110	ON	ON	OFF	OFF
135	ON	OFF	ON	ON
150	ON	OFF	ON	OFF
300	ON	OFF	OFF	ON
600	ON	OFF	OFF	OFF
1200	OFF	ON	ON	ON
1800	OFF	ON	ON	OFF
2400	OFF	ON	OFF	ON
3600	OFF	ON	OFF	OFF
4800	OFF	OFF	ON	ON
7200	OFF	OFF	ON	OFF
9600	OFF	OFF	OFF	ON
19200	OFF	OFF	OFF	OFF

An Example

Figure 2-10 shows you how to set switches 1-1 through 1-4 for a 300 baud modem.


Figure 2-10. Switches Set for a 300 Baud Modem

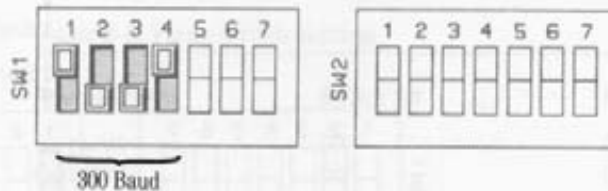

Mode

Switches 1-5 and 1-6 determine whether your card is in printer mode or modem mode. For modem mode, both switch 1-5 and switch 1-6 should be set to ON. See Figure 2-11.

Figure 2-11. Switches Set for Modem Mode

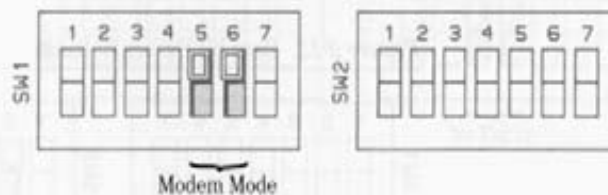


By the Way: Don't worry about switch 1-7 for now. It will be discussed in the section "RS232C Signals."

Stop Bits

Switch 2-1 determines whether there will be one stop bit or two stop bits after each string of data bits. Set it to ON for one stop bit. Set it to OFF for two stop bits. In most cases, it should be set for one stop bit. See Figure 2-12.


Figure 2-12. Stop Bit Switch Settings

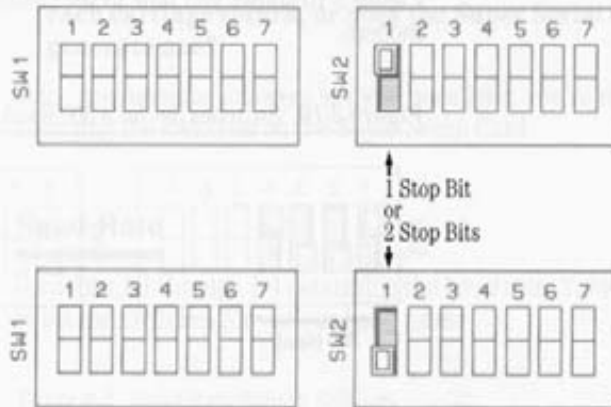

Data Bits

Switch 2-2 determines whether data bits will be sent and received in seven-bit strings or eight-bit strings. Set it to ON for eight data bits. Set it to OFF for seven data bits. In most cases, it should be set for seven data bits. See Figure 2-13.

Figure 2-13. Data Bit Switch Settings

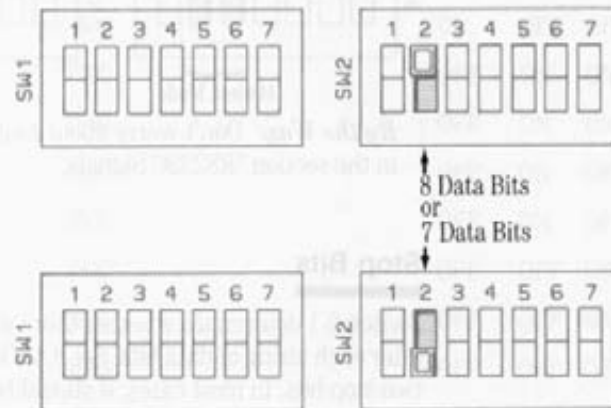

In printer mode, switches 2-3 and 2-4 control line width, not parity.

Parity

Switches 2-3 and 2-4 determine whether there will be a parity bit and, if there is, whether it will be odd parity or even parity. In most cases, it should be set for no parity. Table 2-4 shows you how to set the switches for the three parity options:


Table 2-4. Parity Switch Settings

Type of Parity	Switch 2-3	Switch 2-4
No parity	ON	ON
Odd parity	ON	OFF
Even parity	OFF	OFF

An Example

Figure 2-14 shows how to set switches 2-3 and 2-4 for no parity.

Figure 2-14. No Parity Setting

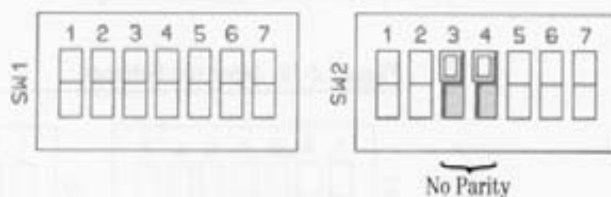


Generate Line Feeds

Switch 2-5 determines whether the card will generate a line feed after each carriage return. **Most of the time this switch should be set to OFF.** You need to flip it on only when there is a printer (attached to the computer at the other end of the phone line) that needs line feeds generated for it.

Set the switch to ON if you want the Super Serial Card to generate line feeds after carriage returns. Set it to OFF if the printer generates its own line feeds after carriage returns. See Figure 2-15.


Figure 2-15. Line Feed Settings

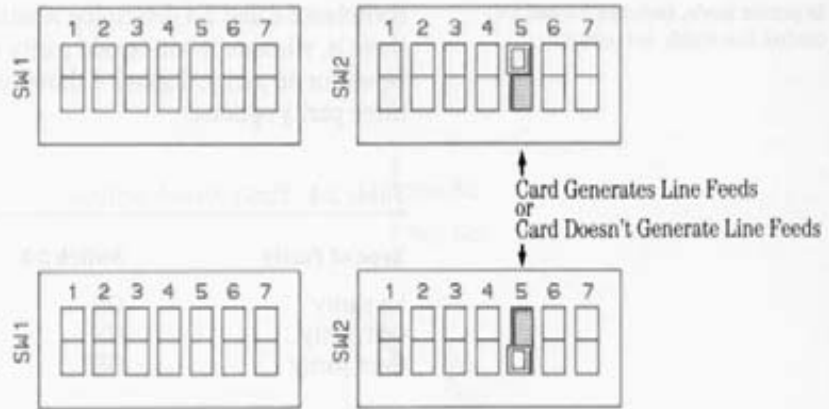

Interrupts

Switch 2-6 controls forwarding of interrupts to the Apple IIe. Set it to ON if you want interrupts forwarded. Set it to OFF if you don't. In most cases it should be set to OFF. See Figure 2-16.

Figure 2-16. Interrupt Settings

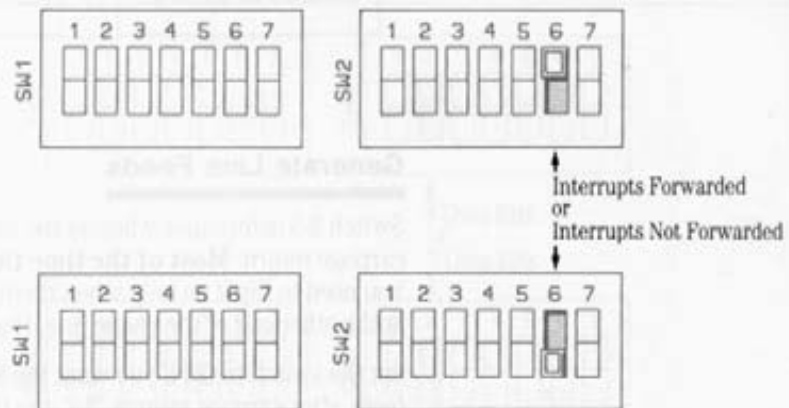


About Interrupts: Apple II's, Apple II Pluses, and early models of Apple IIe's can't handle interrupts, so if you have one of those machines, switch 2-6 should be set to OFF.

RS232C Signals

Switches 1-7 and 2-7 determine whether data will be exchanged in accordance with the RS232C standard (the norm for serial data) or according to some other protocol. Set 1-7 to ON and 2-7 to OFF unless the documentation tells you to set the switches some other way. See Figure 2-17.

Figure 2-17. RS232C Switch Settings




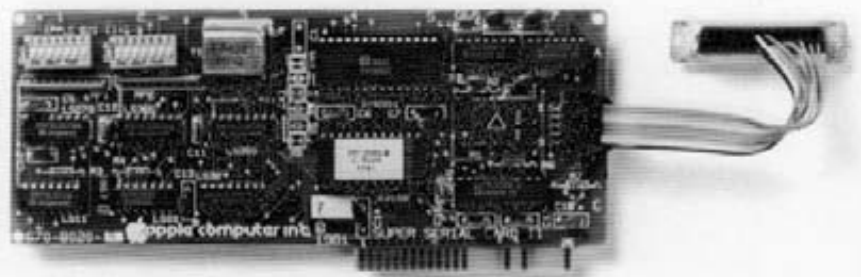

If you had to guess at any of the settings, don't be surprised if your first crack at setting the switches on your Super Serial Card didn't work. Here are some guidelines to help you decide which switches are wrong and what to do about it.

The most common cause of garbage (a string of characters that bear no resemblance to what you typed) is the wrong baud rate or the wrong data format. Other problems have distinctive symptoms that will suggest what the problem is and what you can do about it.

Symptom	Solution
Information isn't getting from your computer to your device in any form.	Make sure the cables are connected. Make sure that the jumper block is pointing the right way. Make sure the Super Serial Card is in the appropriate slot.
Garbage.	Try a different baud rate. Try a different number of data bits, stop bits, or a different kind of parity.
No line feeds.	Change the line feed switch (2-5) to ON.
Too many line feeds.	Change the line feed switch (2-5) to OFF.
Missing characters.	Change to a slower baud rate (from 1200 to 300).
Print runs off the page.	Change switches 2-3 and 2-4 to a narrower line width (printer mode only).
Computer isn't working.	If Super Serial Card is in slot 3, move it to slot 1 or 2.
Screen doesn't echo what you print.	Change switches 2-3 and 2-4 or use the Echo Enable command.

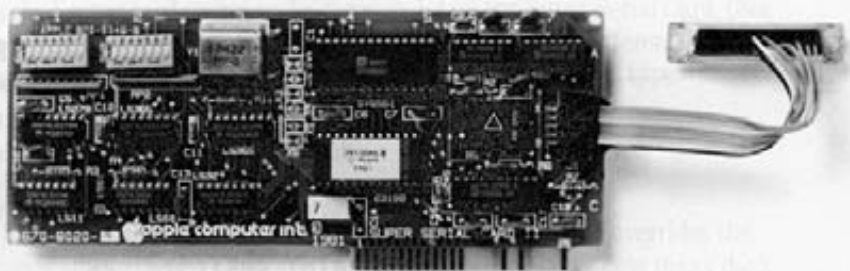

Programmers can override switch settings on the Super Serial Card by imbedding commands within BASIC or Pascal programs or by typing commands at the keyboard under BASIC. The reference card at the back of this manual shows which commands override which switch settings.

To start a Super Serial Card command, use the appropriate CONTROL character:

- `CONTROL-I` for printer mode
- `CONTROL-A` for communications (modem) mode

To end the command, press `RETURN`.

Overriding Commands From a Program

In a BASIC program, put the control character and the command in a PRINT statement. In a Pascal program, put the control character and the command in a WRITE or WRITELN statement. For example, here's how you'd change the baud rate to 1200 in a BASIC program:

```
PRINT CHR$(9); "8B"
```

Here's how you'd change the baud rate to 1200 in a Pascal program:

```
WRITELN (CHR(9), '8B');
```

Overriding Commands From the Keyboard

To override switch settings from the keyboard:

1. Type `IN#s` (where *s* is the slot number that contains your Super Serial Card).
2. Type the appropriate control character (`CONTROL-A` for communications mode, `CONTROL-I` for printer mode).
3. Type the command.
4. Press `RETURN`.

Printer Commands

The group of commands discussed in this section either directly override the Super Serial Card switch settings or affect related behavior of the Super Serial Card. The Reset command restores the switch selections.

Important!

Start each of the printer commands by pressing **CONTROL** **I** and end the commands by pressing **RETURN**.

Baud Rate

Typing the command **nB** (where *n* is a number from 0 to 15) overrides the physical settings of switches 1-1 through 1-4 on the Super Serial Card. (See the reference card for the baud rates associated with the different numbers.) For example, to change the baud rate to 135 baud, type **4B**.

Data Format

Typing the command **nD** (where *n* is a number from 0 to 7) overrides the settings of switches 2-1 and 2-2. The reference card shows how many data and stop bits correspond to each value of *n*. For example, typing **2D** causes the Super Serial Card to transmit each character in this form: six data bits and one stop bit.

Parity

Typing the command **nP** (where *n* is a number from 0 to 7) determines the kind of parity the Super Serial Card will generate when sending data and check for when receiving data. In general, parity checking is not needed in printer mode. However, there are five parity options available. See the reference card for the type of parity associated with the different numbers.

For example, type **1P** if you want the Super Serial Card to transmit and check for odd parity. Odd parity means that the high bit of every character is 0 if there is already an odd number of 1 bits in that character, or 1 if there is otherwise an even number of 1 bits in the character, making the total always odd. This is an easy (but not foolproof) way to check data for transmission errors.

Set Time Delays

Some printers are slow and do not provide a **printer busy**, or **handshake** signal to the Apple II. Typing the command `nC` (where *n* is a number from 0 to 3) causes the Apple II to delay a specified amount of time, after sending a carriage return character, before sending another group (usually another line) to it. (Consult the reference card for the length of delay associated with the various numbers.) The delay gives the print head enough time to return to the left side of the page so it is ready to continue printing. This command overrides the setting of switch 2-2 on the Super Serial Card, which provides only two choices: no delay or a 250 millisecond delay.

Typing the command `nL` (where *n* is a number from 0 to 3) allows time after a line feed character for a printer platen to turn so the paper is vertically positioned to receive the next line.

Typing the command `nF` (where *n* is a number from 0 to 3) allows time after a form feed character for the printer platen to move the paper form to the top of the next page (typically a longer time than a line feed).

Consult the user manual that came with the printer to find out how much time it takes to move its print head and platen. This will help you determine an appropriate set of values for these three delays. The idea is to have at least enough time for the printer parts to move the required distance, but not so much time that overall printing speed is slowed down drastically. A typical set for a *very* slow printer would be `2C, 2L, 3F`; that is, the Super Serial Card waits 250 milliseconds after transmitting carriage returns, 250 milliseconds after transmitting line feeds, and 2 seconds after transmitting form feed characters.

Generate Carriage Return on Column Overflow

Typing the command `c` causes the Super Serial Card to generate a carriage return character automatically any time the column count exceeds the printer line width.

By the Way: Once this is on, only clearing the high-order bit at location `$578+s` (where *s* is the slot containing the Super Serial Card) can turn this option back off. This option is normally off.

Be sure to type a space between the *L* and the *E* or *D*.

Generate Line Feed

Typing the command **L E** (*L* stands for *Line Feed*; *E* stands for *Enable*) causes the Super Serial Card to automatically generate and transmit a line feed character after each carriage return character. This overrides the setting of switch 2-5. For example, you can type **L E** to cause your printer to print listings or double-spaced manuscripts for editing. To disable the command, type **L D** (*D* stands for *Disable*).

Mask Line Feed

Be sure to type a space between the *M* and the *E*.

Typing the command **M E** (*M* stands for *Mask*; *E* stands for *Enable*) causes the Super Serial Card to suppress any incoming line feed character that immediately follows a carriage return character.

Reset the Super Serial Card

Typing the command **R** has the same effect as sending a **PR#0** and an **IN#0** to a BASIC program and then resetting the Super Serial Card. This keyboard command cancels all previous commands to the Super Serial Card and puts the physical switch settings back into force.

Translate Lowercase Characters (Apple II and II Plus)

The Apple II Monitor ROM translates all incoming lowercase characters into uppercase ones before sending them to the video screen or to a BASIC program. The Super Serial Card offers four translation options:

Table B-1. Lowercase Character Displays

Typing This	Gives You This
0T	Change all lowercase characters to uppercase ones before passing them to a BASIC program or to the video screen. This is the way the Apple II Monitor ROM handles lowercase.
1T	Pass along all lowercase characters unchanged. The appearance of the lowercase characters on the Apple II screen is undefined (garbage).
2T	Display lowercase characters as uppercase inverse characters (that is, as dark characters on a light background).
3T	Pass lowercase characters to programs unchanged, but display lowercase as uppercase, and uppercase as inverse uppercase (that is, as dark characters on a light background).

Zap (Suppress) Control Characters

Typing the command **Z** prevents the Super Serial Card from recognizing any further control characters (and hence commands) whether coming from the keyboard or contained in a stream of characters moving through the Super Serial Card.

If you issue the Zap command described here, all further commands are ignored; this is useful if the data you are transmitting contain bit patterns that the Super Serial Card can mistake for control characters.

Important!

The only way to reinstate command recognition after the Zap command is to reinitialize the Super Serial Card, or clear the high-order bit at location $\$5F8+s$ (where s is the slot in which the Super Serial Card is installed).

Find Keyboard

Be sure to type a space between the *F* and the *D* or *E*.

Typing the command **F D** (*F* stands for *Find Keyboard*; *D* stands for *Disable*) protects incoming data from disruption by keystrokes. For example, you can include a Find Keyboard command in a program, followed by a routine that retrieves data coming in through the Super Serial Card, followed by **F E** (for *Enable*) later in the program. The default is **F E**.

XOFF Recognition

Be sure to type a space between the *X* and the *E* or *D*.

Typing the command **X E** (*X* stands for *XOFF*; *E* stands for *Enable*) causes the Super Serial Card to look for any XOFF (decimal 19) character coming from a device attached to the Super Serial Card, and to respond to it by halting transmission of characters until the Super Serial Card receives an XON (decimal 17) from the device, signaling the Super Serial Card to continue transmission. In printer mode, the default value of this command is **X D** (for *Disable*).

By the Way: In printer mode, full duplex communication may not work with XOFF recognition turned on, so be careful.

Tab in BASIC

Be sure to type a space between the *T* and the *E*.

Typing the command **T E** (*T* stands for *Tab*; *E* stands for *Enable*), leaves the BASIC horizontal position counter equal to the column count. All Tabs work, including back-tabs. Tabs beyond column 40 require a POKE to location 36, as usual. Commas work only as far as column 40, and BASIC programs will be listed in 40-column format.

Modem (Communications) Commands

The commands discussed in this section either override the Super Serial Card switch settings or affect related behavior of the Super Serial Card. The Reset command restores the switch selections.

Start each of the modem commands by pressing **CONTROL-A** and end the commands by pressing **RETURN**.

Baud Rate

Typing the command **nB** (where *n* is a number from 0 to 15) overrides the physical settings of switches 1-1 through 1-4 on the Super Serial Card. (See the reference card for the baud rates associated with the different numbers.) For example, to change the rate to 9600 baud, type **14B**.

Data Format

Typing the command **nD** (where *n* is a number from 0 to 7) overrides the settings of switches 2-1 and 2-2. (See the reference card for the data formats associated with the different numbers.) For example, typing **3D** causes the Super Serial Card to transmit each character in this form: five data bits, and one stop bit.

Parity

Typing the command **nP** (where *n* is a number from 0 to 7) determines the kind of parity the Super Serial Card generates when sending data and checks for when receiving data. There are five parity options available. (See the reference card for the parity options associated with each number.)

For example, type **1P** if you want the Super Serial Card to transmit and check for odd parity. Odd parity means that the high bit of every character is 0 if there is already an odd number of 1 bits in that character, or 1 if there is otherwise an even number of 1 bits, making the total always odd.

Generate Line Feed

Typing the command **L E** (*L* stands for *Line Feed*; *E* stands for *Enable*) causes the Super Serial Card to automatically generate and transmit a line feed character after each carriage return character. This overrides the setting of switch 2-5. For example, you can type **L E** to cause a remote printer to produce double-spaced listings or manuscripts for editing.

Be sure to type a space between the *L* and the *E*.

Be sure to type a space between the *M* and the *D*.

Mask Line Feed

If you type the command `M D` (*M* for *Mask*; *D* for *Disable*), the Super Serial Card will not remove incoming line feed characters that immediately follow carriage return characters.

Reset the Super Serial Card

Typing the command `R` has the same effect as sending a `PR#0` and an `IN#0` to a BASIC program and then resetting the Super Serial Card. This keyboard command cancels all previous commands to the Super Serial Card and puts the physical switch settings back into force.

Set Time Delays

Some printers are slow and do not provide a **printer busy**, or **handshake** signal to the Apple II. If such a printer is connected to the Super Serial Card via a modem, you may want to use these three delay commands.

Typing the command `nC` (where *n* is a number from 0 to 3) causes the Apple II to delay a specified amount of time, after sending a carriage return character, before sending another group (usually another line) to it. (See the reference card for the amount of delay associated with each number.) This gives the print head enough time to return to the left side of the page so it is ready to continue printing.

Typing the command `nL` (where *n* is a number from 0 to 3) allows time after a line feed character for a printer platen to turn so the paper is vertically positioned to receive the next line. (See the reference card for the amount of delay associated with each number.)

Typing the command `nF` (where *n* is a number from 0 to 3) allows time after a form feed character for the printer platen to move the paper form to the top of the next page (typically a longer time than a line feed). (See the reference card for the amount of delay associated with each number.)

Consult the user manual that came with the printer to find out how much time it takes to move its print head and platen. This will help you determine an appropriate set of values for these three delays if a printer is used as the remote device. The idea is to have at least enough time for the printer parts to move the required distance, but not so much time that overall printing speed is slowed down drastically.

Translate Lowercase Characters (Apple II and II Plus)

The Apple II Monitor ROM translates all incoming lowercase characters into uppercase ones before sending them to the video screen or to a BASIC program. The Super Serial Card offers four translation options:

Table B-2. Lowercase Character Displays

Typing This	Gives You This
0T	Change all lowercase characters to uppercase before passing them to a BASIC program or to the video screen. This is what the Apple II Monitor ROM does to lowercase.
1T	Pass along all lowercase characters unchanged. The appearance of the lowercase characters on the Apple II screen is undefined (garbage).
2T	Display lowercase characters as uppercase inverse characters (that is, as dark characters on a light background).
3T	Pass lowercase characters to programs unchanged, but display lowercase as uppercase, and uppercase as inverse uppercase (that is, as dark characters on a light background).

Zap (Suppress) Control Characters

Typing the command **z** prevents the Super Serial Card from recognizing any further control characters (and hence commands) in the stream of characters moving through the Super Serial Card.

If you issue the Zap command, all further commands are ignored; this is useful if the data you are transmitting contain bit patterns that the Super Serial Card can mistake for control characters.

Important!

The only way to reinstate command recognition after invoking the Zap command is to reset the Super Serial Card, or clear the high-order bit at location $\$5F8+s$ (with the Super Serial Card in slot *s*).

Be sure to type a space between the *F* and the *D* or *E*.

Find Keyboard

Typing the command **F D** (*F* stands for *Find Keyboard*; *D* stands for *Disable*) protects incoming data from disruption by keystrokes.

For example, you can include **F D** in a program, followed by a routine that retrieves data coming in through the Super Serial Card, followed by **F E** (for *Enable*) later in the program.

XOFF Recognition

In communications mode, the Super Serial Card automatically recognizes any XOFF (decimal 19) character coming from a device attached to it, and responds to it by halting transmission of characters. The Super Serial Card resumes transmission as soon as it receives an XON character (decimal 17) from the device. To disable XOFF recognition, type **X D** (*X* stands for *XOFF*; *D* stands for *Disable*).

Be sure to type a space between the *X* and the *D*.

Specify Screen Slot (Apple II and II Plus)

Typing the command **sS** (where *s* is the slot number of a display device) chains the Super Serial Card to another card slot, such as a slot containing an 80-column card. (Normally this is slot 0, the Apple II video screen.) For the firmware in the Super Serial Card to pass on information to the firmware in the other card, the other card must have an output entry point within its Cs00 space; this is the case for all currently available 80-column cards for the Apple II.

For example, let's say you have the Super Serial Card in slot 2 with a remote terminal connected to it, and an 80-column card in slot 3. Type **3S** to cause the data from the remote terminal to be chained through the card in slot 3, so that it is displayed on the Apple II in 80-column format. This command is not available in Pascal.

Echo Characters on the Screen (Apple II and II Plus)

Be sure to type a space between the *E* and the *D*.

For the Apple II, as for most computers, displaying (echoing) a character on the video screen is a separate step from receiving it from the keyboard, though you tend to think of these as one step, as on a typewriter. For example, if you type **E D** (*E* stands for *Echo*; *D* stands for *Disable*), the Super Serial Card does not forward incoming characters to the Apple II screen. This can be used to hide someone's password entered at a terminal, or to avoid double-display of characters.

Terminal Mode

Under communications mode, the Super Serial Card can enter terminal mode and make the Apple II act like an dumb terminal. This is useful for connecting the Apple II to a computer time-sharing service, or for conversing with another Apple II.

Typing Lowercase Characters (Apple II and II Plus)

Terminal mode makes it possible to generate lowercase characters, plus the ten ASCII characters not provided on the Apple II keyboard (plus ESCAPE, since **ESC** is used for this feature).

To generate lowercase characters, press **ESC** once, and then type alphabetic characters as you would normally do. After that, to capitalize a single letter, press **ESC** again before typing the letter. To lock the keyboard in uppercase, press **ESC** twice in succession. To get back to lowercase, press **ESC** once, as before.

To generate one of the special ASCII characters listed below, first press **ESC** once (if necessary) to place the keyboard in lowercase mode. Then press **ESC** a second time, followed by one of the top-row keys shown below.

For example, to send a tilde, make sure the keyboard is in lowercase mode, then type **ESC** followed by **9**.

ESC followed by:	1	2	3	4	5	6	7	8	9	0	:
Generates:	FS	US	[\	_				~	ESC	RUB
Or in hexadecimal:	9C	9F	DB	DC	DF	FB	FC	FD	FE	9B	FF

Enter Terminal Mode

Typing the command **T** causes the Apple II to function as a full-duplex dumb terminal. You can use this command in conjunction with the Echo command to simulate the half-duplex terminal mode of the old Apple II Communications Card.

By the Way: If you enter terminal mode and don't see what you type echoed on the Apple video screen, probably the modem link has not yet been established, or you need to use the **EE** command. (The first *E* stands for *Echo*; the second *E* stands for *Enable*.)

Transmit a Break Signal

Typing the command **B** causes the Super Serial Card to transmit a 233-millisecond break signal, recognized by most time-sharing systems as a signoff.

Special Characters

Be sure to type a space between the *S* and the *E* or *D*.

Typing the command **S E** (*S* stands for *Special Characters*; *E* stands for *Enable*) causes the Super Serial Card to interpret **[ESC] n** pairs as special characters, allowing a keyboard in this way to generate all possible ASCII characters. If you type **S D** (*D* stands for *Disable*), the Super Serial Card will treat **[ESC]** like any other key.

Quit Terminal Mode

Type the command **Q** to exit from terminal mode.

A Terminal Mode Example

You can use the following sample program to change the Super Serial Card temporarily from the characteristics you ordinarily use to the characteristics needed to make the Apple II into a dumb terminal connected to the *Dow Jones News & Quote Reporter*. This program assumes that the Super Serial Card is set for communications mode and that the jumper block is pointing toward *MODEM*. Neither of these conditions can be changed by software. This program also assumes that the Super Serial Card is in slot 1 and that you want to chain I/O to an 80-column card; these conditions you can change via software.



```

10 REM
.....
20 REM * THIS PROGRAM SETS UP THE Super Serial
Card FOR DOW JONES *
30 REM
.....
40 D$=CHR$(4)
42 A$=CHR$(1)
50 PRINT D$;"PR#1": REM Super Serial Card IS
IN SLOT #1;
52 PRINT A$;"6 BAUD": REM SET BAUD RATE TO 300;
54 PRINT A$;"1 DATA": REM DATA FORMAT OF 7 DATA,
1 STOP
56 PRINT A$;"0 PARITY": REM AND NO PARITY;
58 PRINT A$;"LF DISABLE": REM NO <LF> GENERATION
AFTER <CR>.
60 PRINT A$;"3 SLOTCN": REM CHAIN TO CARD IN SLOT
#3
62 PRINT A$;"TERM MODE": REM AND ENTER TERMINAL
MODE.
70 REM
.....
72 REM * NOW YOU SHOULD BE IN TERMINAL MODE, GETTING
THE *
74 REM * INFO YOU NEED FROM THE DOW JONES SERVICE.
WHEN *
76 REM * FINISHED, EXIT WITH THE <CTRL-A>Q<UIT
COMMAND. *
78 REM
.....
100 REM Q<UIT COMMAND SENDS CONTROL BACK TO THIS
PROGRAM:
110 PRINT A$;"RESET": REM RESET SWITCH-SELECTED
OPTIONS
120 END

```

Appendix C

Firmware

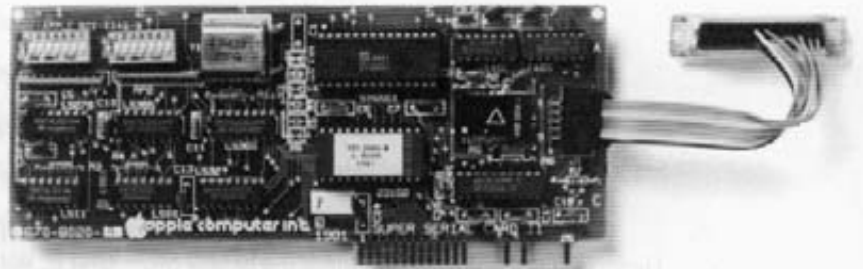

This appendix contains the following information:

- an explanation of the Pascal 1.1 firmware card protocol (which also applies to later versions of Pascal)
- a list of firmware entry points and 6502 register values

Pascal 1.1 Firmware Protocol

The old Apple II Serial Interface Card (SIC) ran under Pascal 1.0 with three direct firmware entry points, one for each of the three I/O functions it supported:

Address	Contains
\$C800	initialization routine entry point
\$C84D	read routine entry point
\$C9AA	write routine entry point

New peripheral cards can be accepted into the Pascal 1.0 system by appearing to be a SIC—that is, with these same three entry points and with \$38 at \$Cs05 and \$18 at \$Cs07 (see “Device Identification” later in this appendix).

Pascal 1.1 and later versions of Pascal, on the other hand, are more flexible, and also support more I/O functions. They can make indirect calls to the firmware in a (new) peripheral card through addresses in a branch table in the card’s firmware. They also have facilities for identifying new peripheral I/O devices.

Entry Points

The I/O routine entry point branch table is located near the beginning of the Cs00 address space (*s* being the slot number where the peripheral card is installed). This space was chosen instead of the \$C800 space because under BASIC protocol the \$Cs00 space is required, while the \$C800 space is optional.

The branch table locations that Pascal 1.1 and later versions of Pascal use are:

Address	Contains
\$Cs0D	initialization routine offset (required)
\$Cs0E	read routine offset (required)
\$Cs0F	write routine offset (required)
\$Cs10	status routine offset (required)
\$Cs11	\$00 if optional offsets follow; non-zero if not
\$Cs12	control routine offset (optional)
\$Cs13	interrupt handling routine offset (optional)

Notice that \$Cs11 contains \$00 only if the control and interrupt handling routines are supported by the firmware. (For example, the Super Serial Card does not support these two routines, and so location \$Cs11 contains a non-zero firmware instruction.) Apple II Pascal 1.0 and 1.1 do not support control and interrupt requests, but such requests may be implemented in future versions of the Pascal BIOS and other future Apple II operating systems.

Here are the entry point addresses and the contents of the 6502 registers on entry to and on exit from Pascal 1.1 (and later versions of Pascal) I/O routines:

Table C-1. I/O Routine Offsets and Registers Under Pascal 1.1

Address	Offset for	X Register	Y Register	A Register
\$Cs0D	Initialization			
	On entry	\$Cs	\$s0	
	On exit	error code	(unchanged)	(unchanged)
\$Cs0E	Read			
	On entry	\$Cs	\$s0	
	On exit	error code	(unchanged)	character read
\$Cs0F	Write			
	On entry	\$Cs	\$s0	char. to write
	On exit	error code	(unchanged)	(unchanged)
\$Cs10	Status			
	On entry	\$Cs	\$s0	request (0 or 1)
	On exit	error code	(unchanged)	(unchanged)

Note: Request code 0 means "Are you ready to accept output?" Request code 1 means "Do you have input ready?" On exit, the reply to the status request is in the carry bit: carry clear means "No"; carry set means "Yes."

Device Identification

Pascal 1.1 and later versions of Pascal use four firmware bytes to identify the peripheral card. Both the identifying bytes and the branch table are near the beginning of the \$Cs00 ROM space. The identifiers are listed in Table C-2.

Table C-2. Bytes Used for Device Identification

Address	Value
\$Cs05	\$38 (like the old Serial Interface Card)
\$Cs07	\$18 (like the old Serial Interface Card)
\$Cs0B	\$01 (the Generic Signature of new FW cards)
\$Cs0C	\$ci (the Device Signature; see Table C-3)

The first digit, *c*, of the Device Signature byte identifies the device class as listed in Table C-3.

Table C-3. Device Class Digit

Digit	Class
\$0	reserved
\$1	printer
\$2	joystick or other X-Y input device
\$3	serial or parallel I/O card
\$4	modem
\$5	sound or speech device
\$6	clock
\$7	mass storage device
\$8	80-column card
\$9	network or bus interface
\$A	special purpose (none of the above)
\$B-F	reserved for future expansion

The second digit, *i*, of the Device Signature byte is a unique identifier for the card, assigned by Apple Technical Support. For example, the Super Serial Card has a Device Signature of \$31: the 3 signifies that it is a serial or parallel I/O card, and the 1 is the low-order digit supplied by Apple Technical Support.

Although version 1.1 and later versions of Pascal ignore the Device Signature, application programs can use them to identify specific devices.

Super Serial Card Entry Points

This section contains the Super Serial Card firmware entry points for BASIC, Pascal 1.0, and Pascal 1.1 (which also applies to later versions of Pascal). The Pascal 1.1 entry point offsets conform to the Firmware card protocol outlined in the first section of this appendix.

BASIC Entry Points

Here are the entry point addresses and the contents of the 6502 registers on entry to and on exit from BASIC I/O routines:

Table C-4. BASIC Entry Points Used by the Super Serial Card

Address	Routine	X Register	Y Register	A Register
\$Cs00	Initialization ¹			
	On entry	anything	anything	anything
	On exit	(unchanged)	(unchanged)	
\$Cs05	Input ²			
	On entry	anything	anything	anything
	On exit	(unchanged)	(unchanged)	character in
\$Cs07	Output ³			
	On entry	anything	anything	character out
	On exit	(unchanged)	(unchanged)	(changed)

¹ CSW and/or KSW points to \$Cs00. The character in the A register is output unless KSW points to \$Cs00 and CSW does not point to \$Cs00.

² Character in is from ACIA or keyboard.

³ Character out is transmitted through the ACIA.

Pascal 1.0 Entry Points

There are three Pascal 1.0 entry points: one for initialization, one for read operations, and one for write operations. These entry points are direct addresses.

Table C-5. Pascal 1.0 Entry Points Used by the Super Serial Card

Address	Routine	X Register	Y Register	A Register
\$C800	Initialization ¹			
	On entry	\$Cs	\$s0	anything
	On exit	\$Cs	\$s0	(unchanged)
\$C84D	Read ²			
	On entry	\$Cs	\$s0	anything
	On exit	\$Cs	\$Cs	character in
\$C9AA	Write ³			
	On entry	\$Cs	\$s0	character out
	On exit	error code	\$Cs	(changed)

¹ \$C800 space is enabled. Firmware initializes the Super Serial Card to default values plus switch selections.

² \$C800 space is enabled. Pascal returns ACIA or keyboard data in the A Register and location \$678+s with high bit cleared.

³ \$C800 space is enabled. Output character is transmitted through the ACIA. Pascal posts error code to IORESULT.

Pascal 1.1 Entry Points

The Pascal 1.1 entry point protocol is outlined in the first section of this appendix. The values given here are the addresses of the routines. Unlike Pascal 1.0, later versions of Pascal enter these routines using indirect addressing.

Table C-6. Pascal 1.1 Offsets Used by the Super Serial Card

Address	Offset for	Value	X Register	Y Register	A Register
\$Cs0D	Initialization ¹ On entry On exit	\$(Cs)8E	\$Cs \$00	\$s0 \$s0	anything (changed)
\$Cs0E	Read ² On entry On exit	\$(Cs)94	\$Cs error code	\$s0 \$Cs	anything char. in
\$Cs0F	Write ³ On entry On exit	\$(Cn)97	\$Cs error code	\$s0 \$Cs	char. out (changed)
\$Cs10	Status ⁴ On entry On exit	\$(Cs)9A	\$Cs error code	\$s0 \$s0	request (0 or 1) error code

¹ \$C800 space is enabled. Firmware initializes the Super Serial Card to default values plus switch selections.

² \$C800 space is enabled. Character in from ACIA or keyboard is returned in the A Register.

³ \$C800 space is enabled. The byte in the A Register is sent out through the ACIA.

⁴ \$C800 space is enabled. Request = 0 asks ACIA whether it is ready to transmit another byte; request = 1 asks ACIA whether it has an input character available. On exit, carry bit = 0 for Yes or 1 for No.

Glossary

ASCII: Stands for *American Standard Code for Information Interchange*. Pronounced *ask' ee*. It's a standard defining the 128 codes that represent all the letters, numbers, and punctuation marks on the keyboard.

baud: A designation for how fast peripheral devices can receive and/or send data. Sometimes referred to as *bits per second*.

binary: The representation of numbers in terms of powers of two, using the two digits 0 and 1. Commonly used in computers because the values 0 and 1 can easily be represented in physical form in a variety of ways, such as the presence or absence of current, positive or negative voltage, or a white or black dot on a display screen. A single binary digit—a 0 or 1—is called a **bit**.

bit: The word *bit* is a contraction of the words *binary digit*, and that's what a bit is—a 0 or a 1.

carriage return: An ASCII character that causes a printer or display screen to place the next character typed on the left margin. On a typewriter, this movement is combined with a line feed (the advancement of the paper to the

next line). With computers, the carriage return and line feed are separate—causing hair-raising problems for the user.

character: A letter, number, or punctuation mark.

communications mode: A mode is a manner of operating. Communications mode is the manner of operating for modems.

data: Information, especially raw or unprocessed information, used or operated on by a program.

data bits: A set of seven or eight bits that represent a character.

data format: The way that data is sent between the computer and a peripheral device. See **data bits**, **stop bits**, and **parity**.

device: A printer, modem, or other piece of equipment attached to the computer.

echo: To send an input character to the screen, the printer, or other output device. On a typewriter, what you type on the keyboard appears on the page in the same step. With a computer, these two steps are controlled separately.

even parity: Use of an extra bit set to either 0 or 1 to make the total number of 1 bits an *even* number. For example, the 7-bit ASCII code for the letter *A* is 1000001. It has two 1 bits. For even parity, the transmitting device adds a 0 parity bit so that the total number of 1 bits remains even. The receiving device counts the 1 bits as a way of checking for transmission errors. Compare **odd parity**.

handshake signal: A kind of communications protocol in which the receiving device, when it has successfully received a character or block of characters, sends back an acknowledging signal, thereby triggering the next transmission.

input: Information transferred into a computer from some external source, such as the keyboard, a disk drive, or a modem. The act of transferring such information.

interface: The devices, rules, or conventions by which one component of a system communicates with another.

interrupt: A special control signal from an outside device that diverts the Apple II from the program it's executing so it can handle the condition that caused the interruption.

jumper block: A plastic plug with pins connected in such a way that it passes signals between the Super Serial Card and the device either unchanged (for modems) or altered (for printers).

line feed: An ASCII character that causes a printer or display to advance to the next line.

local: Nearby. Capable of direct connection using wires only.

mode: Manner of operating. The Super Serial Card can operate in printer mode or communications (modem) mode.

modem: A contraction of *modulator/demodulator*. It's a device that links your computer to other computers over the phone lines.

odd parity: Use of an extra bit set to 0 or 1 to make the total number of 1 bits an odd number. For example, the 7-bit ASCII code for the letter *A* is 1000001. It has two 1 bits. For odd parity, the transmitting device adds an eighth bit equal to 1, making the total number of 1 bits odd. The receiving device can check for transmission errors by counting 1 bits. If the total comes out odd, there was no error. If the total comes out even, there was an error. Compare **even parity**.

output: Information transferred from a computer to some external destination, such as the display screen, a disk drive, a printer, or a modem.

parallel interface: A type of connection between devices that allows the devices to send eight bits of data at a time. The data travel on eight parallel wires. Compare **serial interface**.

parity: A way of checking to see if data made it from one device to another without getting bits bungled. See **even parity** and **odd parity**.

plotter: A device that produces paper copies of graphs and other drawings created with a computer graphics program.

printer busy signal: See **handshake signal**.

printer mode: A mode is a manner of operating. When the Super Serial Card is in printer mode, it's set up to operate with a printer.

remote computer: A computer other than your Apple II, but connected to it, either directly or through modems and telephone lines. A remote computer can be at any distance from the Apple II, from right beside it to thousands of miles away.

RS232C: A standard created by the Electronic Industries Association to allow devices from different manufacturers to exchange serial data—particularly over the phone lines.

serial interface: A type of connection between devices in which information is sent one bit at a time—along one wire. This makes it possible for devices to exchange information across phone lines. Compare **parallel interface**.

stop bits: Special bits that signal the end of characters (data bits).

Super Serial Card: The interface card described in this manual. It's called *super* because it can simultaneously transmit and receive data in one of 35 formats at any of 15 speeds.

terminal: An input/output device usually made up of a keyboard and a video display. It can receive and display information from a computer system.

Index

A

- Apple II
 - installing in 6
- Apple IIe, interrupts and 22
- Apple II (original model)
 - interrupts and 22
 - Specify Screen Slot command (modem) and 37
 - Translate Lowercase Characters command (modem) and 36
 - Translate Lowercase Characters command (printer) and 31-32
 - typing lowercase characters with 38
- Apple II Plus
 - installing in 6
 - interrupts and 22
 - Specify Screen Slot command (modem) and 37
 - Translate Lowercase Characters command (modem) and 36
 - Translate Lowercase Characters command (printer) and 31-32
 - typing lowercase characters with 38

B

- BASIC entry points 46
- baud rate 11, 17
 - setting switches for modem 18-19
 - setting switches for printer 12
- Baud Rate command
 - modem and 34
 - printer and 29
- binary 11, 17
- bits 11, 17
- break signal, transmitting 39

C

- carriage return
 - delay after 11
 - generating (printer) 30
 - setting switches for delay after (printer) 14
- commands
 - modem 28, 33-40
 - printer 28, 29-33
 - starting 28
- communication commands
 - See modem commands
- communications mode
 - See modem mode
- connecting
 - to modem 6
 - to printer 6
- CONTROL** **A** 28
- CONTROL** **I** 28
- control characters, suppressing
 - with modem 36
 - with printer 32

D

- Daisy Wheel, switch settings for 3
- data bits 11, 17
 - setting switches for modem 20
- Data Format command
 - modem and 34
 - printer and 29
- delay after carriage return 11
 - setting switches for printer 14
- device identification 44-45
- Device Signature byte 45-46
- dumb terminal
 - See terminal mode

E

- Echo command (modem) 38, 39
- entering terminal mode 39
- entry points
 - BASIC 46
 - Pascal 1.0 47
 - Pascal 1.1 42-44, 47-48
 - Serial Interface Card 42

F

- Find Keyboard command
 - modem and 37
 - printer and 33
- firmware
 - entry points 42-44, 46-48
 - protocol (Pascal 1.1) 42-46
- Form Feed command
 - modem and 35
 - printer and 30

G

- Generate Carriage Return command (printer) 30
- Generate Line Feed command
 - modem and 34
 - printer and 31
- generating
 - carriage return (printer) 30
 - line feed (modem) 34
 - line feed (printer) 31
 - special characters 39

H

- help 26

I

- ImageWriter, switch settings for 3
- ImageWriter II, switch settings for 3
- installing 4-7
- interference viii-ix
- interrupts
 - setting switches for modem 22
 - setting switches for printer 16

J

- jumper block 2
 - setting 3

K

- keyboard
 - Find Keyboard command (modem) and 37
 - Find Keyboard command (printer) and 33
 - overriding switch settings from 28

L

- line feed 11, 18
 - generating (modem) 34
 - generating (printer) 31
 - masking (modem) 35
 - masking (printer) 31
 - setting switches for modem 21-22
 - setting switches for printer 15-16
- Line Feed command
 - modem and 35
 - printer and 30
- line width 11
 - setting switches for printer 14-15

M, N

- Mask Line Feed command
 - modem and 35
 - printer and 31
- masking
 - line feed (modem) 35
 - line feed (printer) 31
- mode
 - setting switches for modem 19
 - setting switches for printer 13
- modem
 - connecting to 6
 - setting switches for 3, 17-23
- Modem 300, switch settings for 3
- Modem 1200, switch settings for 3
- modem commands 33-40
 - Baud Rate 34
 - [CONTROL]-[A] and 28
 - Data Format 34
 - Echo 38, 39
 - Find Keyboard 37
 - Form Feed 35
 - Generate Line Feed 34
 - Line Feed 35
 - Mask Line Feed 35
 - Parity 34
 - Reset 33, 35
 - Set Time Delays 35
 - Specify Screen Slot 37
 - Terminal Mode 38-40
 - Translate Lowercase Characters 36
 - XOFF Recognition 37
 - Zap 36
- modem mode
 - setting switches for 19
 - starting commands from 28

O

- overriding switch settings 4, 11, 28

P, Q

- parity 17
 - setting switches for modem 21
- Parity command
 - modem and 34
 - printer and 29
- Pascal 1.0 entry points 47
- Pascal 1.1 entry points 42-44, 47-48
- Personal Modem, switch settings for 3
- plotter
 - See printer
- Plotter, switch settings for 3
- printer
 - connecting to 6
 - setting switches for 3, 11-17
- printer commands 29-33
 - Baud Rate 29
 - [CONTROL]-[I] and 28
 - Data Format 29
 - Find Keyboard 33
 - Form Feed 30
 - Generate Carriage Return 30
 - Generate Line Feed 31
 - Line Feed 30
 - Mask Line Feed 31
 - Parity 29
 - Reset 29, 31
 - Set Time Delays 30
 - Tab 33
 - Translate Lowercase Characters 31-32
 - XOFF Recognition 33
 - Zap 32

- printer mode
 - setting switches for 13
 - starting commands from 28
- problems 26
- programs, overriding switch settings from 28

R

- radio interference viii-ix
- Reset command
 - modem and 33, 35
 - printer and 29, 35
- RS232C signals
 - setting switches for modem 23
 - setting switches for printer 16-17

S

- Scribe, switch settings for 3
- Serial Interface Card entry points 42
- Set Time Delays command
 - modem and 35
 - printer and 30
- setting
 - jumper block 3
 - switches 3-4, 10-11
 - switches for modem 3, 17-23
 - switches for printer 3, 11-17
- special characters, generating 39
- Specify Screen Slot command
 - (modem) 37
- starting commands 28
- stop bits 11, 17
 - setting switches for modem 19-20
 - setting switches for printer 13

- suppressing control characters

- modem and 36
- printer and 32

switch(es) 2

- 1-1 (modem) 18-19
- 1-1 (printer) 12
- 1-2 (modem) 18-19
- 1-2 (printer) 12
- 1-3 (modem) 18-19
- 1-3 (printer) 12
- 1-4 (modem) 18-19
- 1-4 (printer) 12
- 1-5 (modem) 19
- 1-5 (printer) 13
- 1-6 (modem) 19
- 1-6 (printer) 13
- 1-7 (printer) 16-17
- overriding settings 4, 11, 28
- setting 3-4, 10-11
- setting for modem 17-23
- setting for printer 11-17
- 2-1 (modem) 19-20
- 2-1 (printer) 13-14
- 2-2 (modem) 20
- 2-2 (printer) 14
- 2-3 (modem) 21
- 2-3 (printer) 14-15
- 2-4 (modem) 21
- 2-4 (printer) 14-15
- 2-5 (modem) 21-22
- 2-5 (printer) 15-16
- 2-6 (modem) 22
- 2-6 (printer) 16
- 2-7 (modem) 23
- 2-7 (printer) 16-17

T, U, V, W

- Tab command (printer) 33
- television interference viii-ix
- terminal mode 38-39
 - Echo command and 39
 - entering 39
 - example 39-40
 - generating special characters in 39
 - quitting 39
 - transmitting break signal in 39
 - typing lowercase characters in 38
- Translate Lowercase Characters
 - command
 - modem and 36
 - printer and 31-32
- transmitting break signal 39
- troubleshooting 26
- typing lowercase characters 38

X, Y

- XOFF Recognition command
 - modem and 37
 - printer and 33

Z

- Zap command
 - modem and 36
 - printer and 32



Apple II Super Serial Card Quick Reference Card

Communications Mode

Under DOS/BASIC: any slot s (1 through 7); use IN#s and PR#s.
Under Pascal: slot 2 (Transfer files from #7; or from REMIN;
Transfer files to #8; or REMOUT.)

Band Rate	Switch SW1-							Switch SW2-							Commands Start Command With CONTROL-A	BASIC Defaults	Pascal Defaults
	1	2	3	4	5	6	7	1	2	3	4	5	6	7			
Undefined																Switch Settings	Switch Settings
50	ON	ON	ON	ON	ON	ON	ON								0B		
75	ON	ON	ON	ON	OFF	ON	OFF								1B		
110	ON	ON	ON	OFF	ON	ON	OFF								2B		
135	ON	ON	ON	OFF	OFF	ON	OFF								3B		
150	ON	OFF	ON	ON	ON	ON	OFF								4B		
300	ON	OFF	ON	ON	OFF	ON	OFF								5B		
600	ON	OFF	OFF	ON	ON	ON	OFF								6B		
1200	OFF	ON	ON	ON	ON	ON	ON								7B		
1800	OFF	ON	ON	ON	OFF	ON	OFF								8B		
2400	OFF	ON	ON	OFF	ON	ON	OFF								9B		
3600	OFF	ON	ON	OFF	ON	ON	OFF								10B		
4800	OFF	OFF	ON	ON	OFF	ON	OFF								11B		
7200	OFF	OFF	ON	ON	OFF	ON	OFF								12B		
9600	OFF	OFF	OFF	ON	ON	ON	OFF								13B		
19200	OFF	OFF	OFF	OFF	ON	ON	OFF								14B		
															15B		
Mode																	
Communication						ON	ON								Can't Override Switch Setting		
Data Format																	
8 Data/1 Stop															0D		Switch Settings
7 Data/1 Stop						ON	ON								1D		Switch Settings
6 Data/1 Stop						ON	OFF								2D		
5 Data/1 Stop															3D		
8 Data/2 Stop						OFF	ON								4D		
7 Data/2 Stop						OFF	OFF								5D		
6 Data/2 Stop															6D		
5 Data/2 Stop															7D		

	Switch SW1-							Switch SW2-							Commands Start Command With CONTROL-A	BASIC Defaults	Pascal Defaults
	1	2	3	4	5	6	7	1	2	3	4	5	6	7			
<u>Translate Lowercase to Uppercase</u> LC to UC LC stays LC LC to UC Inverse UC to LC Inverse															ØT 1T 2T 3T	LC to UC (Command Not Supported)	LC to UC (Command Not Supported)
<u>Zap Control Commands</u>															Z	No Zap	No Zap
<u>Find Keyboard</u> Accept Keyboard Input Suppress Keyboard Input															F E F D	Enabled	Enabled
<u>XOFF Recognition</u> Detect XOFF/ Await XON Do Not Check for XOFF															X E X D	Enabled	Disabled
<u>Specify Screen Slot</u>															s S s=slot #		
<u>Echo Characters on Screen</u> Echo (Half Duplex) No Echo (Full Duplex)															E E E D	No Echo	Not Supported
<u>Terminal Mode Commands</u> Enter Terminal Mode Transmit 233 ms BREAK Special Characters Enabled Disabled Quit Terminal Mode															T B S E S D Q		

Printer Mode

Under DOS/BASIC: any slot s (1 through 7) for printer or terminal; use PR#s for printer, IN#s and PR#s for terminal.

Under Pascal: slot 1 for printer (Transfer files from #8: or from PRINTER slot 3 for terminal (I/O rerouted to terminal)).

Band Rate	Switch SW1-							Switch SW2-							Commands Start Command With CONTROL	BASIC Defaults	Pascal Defaults
	1	2	3	4	5	6	7	1	2	3	4	5	6	7			
Undefined																Switch Settings	Switch Settings
50	ON	ON	ON	ON	ON	ON	ON								08		
75	ON	ON	ON	ON	OFF	ON	ON								1B		
110	ON	ON	ON	OFF	ON	ON	ON								2B		
135	ON	ON	ON	OFF	OFF	ON	ON								3B		
150	ON	ON	OFF	ON	ON	ON	ON								4B		
300	ON	OFF	ON	ON	OFF	ON	ON								5B		
600	ON	OFF	OFF	ON	ON	ON	ON								6B		
1200	ON	OFF	OFF	OFF	OFF	ON	ON								7B		
1800	OFF	ON	ON	ON	ON	ON	ON								8B		
2400	OFF	ON	ON	ON	OFF	ON	ON								9B		
3600	OFF	ON	ON	OFF	ON	ON	ON								10B		
4800	OFF	ON	ON	OFF	OFF	ON	ON								11B		
7200	OFF	OFF	ON	ON	ON	ON	ON								12B		
9600	OFF	OFF	ON	ON	OFF	ON	ON								13B		
19200	OFF	OFF	OFF	ON	ON	ON	ON								14B		
	OFF	OFF	OFF	OFF	OFF	OFF	OFF								15B		
Mode																	
Printer								OFF	ON								
SIC P8 EM.								ON	OFF								
SIC P8A EM.								OFF	OFF								
Data Format																	
8 Data/1 Stop								ON								8 Data	8 Data
7 Data/1 Stop																	
6 Data/1 Stop																	
5 Data/1 Stop																	
8 Data/2 Stop									OFF							Switch Setting for Stop Bits	Switch Setting for Stop Bits
7 Data/2 Stop																	
6 Data/2 Stop																	
5 Data/2 Stop																	

	Switch SW1-							Switch SW2-							Commands Start Command with CONTROL	BASIC Defaults	Pascal Defaults
	1	2	3	4	5	6	7	1	2	3	4	5	6	7			
<u>Parity</u> None Odd Even MARK SPACE															0P (2, 4, 6P) 1P 3P 5P 7P	None	None
<u>Delay After Carriage Return</u> None 32 ms 250 ms (1/4 sec) 2000 ms (2 sec)															0C 1C 2C 3C	Switch Setting	Switch Setting
<u>Line Width</u> 40 72 80 132															Use Column Overflow Command	Switch Settings	Not Supported
<u>Generate Line Feeds</u> Yes No															L E L D	Switch Setting	Disabled
<u>Interrupts</u> Off On																	
<u>Protocol</u> Normal Clear to Send (RS-232-C) Secondary Clear to Send																	
<u>Delay After Form Feed</u> None 32 ms 250 ms (1/4 sec) 2000 ms (2 sec)																	
															0F 1F 2F 3F	None	None

	1	2	3	4	5	6	7	1	2	3	4	5	6	7	Commands Start Command with CONTROL-A	BASIC Defaults	Pascal Defaults
<u>Translate Lowercase to Uppercase</u> LC to UC LC stays LC LC to UC Inverse UC to LC Inverse															ØT 1T 2T 3T	LC to UC (Command Not Supported)	LC to UC (Command Not Supported)
<u>Zap Control Commands</u>															Z	No Zap	No Zap
<u>Find Keyboard</u> Accept Keyboard Input Suppress Keyboard Input															F E F D	Enabled	Enabled
<u>XOFF Recognition</u> Detect XOFF/ Await XON Do Not Check for XOFF															X E X D	Enabled	Disabled
<u>Specify Screen Slot</u>															s S s=slot #		
<u>Echo Characters on Screen</u> Echo (Half Duplex) No Echo (Full Duplex)															E E E D	No Echo	Not Supported
<u>Terminal Mode Commands</u> Enter Terminal Mode Transmit 233 ms BREAK Special Characters Enabled Disabled Quit Terminal Mode															T B S E S D Q		



Apple Computer, Inc.
20525 Mariani Avenue
Cupertino, California 95014
408 996-1010
TLX 171-576

030-1258-C
©1985, Apple Computer, Inc.
Printed in Singapore

